



WR625G

*AC1200
Whole Home Mesh
WiFi System*





WR625G Mesh Router is a gigabit dual-band mesh router. It adopts MTK mainstream chip solution. Its mesh protocol is based on the EasyMesh standard of the Wi-Fi Alliance.

It has the functions of self-organizing, self-repairing, and self-expanding. Mesh WIFI routers with multiple ethernet ports are perfectly matched and work together to eliminate signal dead spots, easily satisfying family scenes such as large flats, duplex, and villas, so that good signals can be achieved everywhere.

WR625G provides a maximum wireless access rate of 1200Mbps, 1 Gigabit WAN port, and 2 Gigabit LAN ports.

Main Features




Dual-band WiFi



IPV6



TR069



Gigabit Ports



Access Control



Multicast



MU-MIMO




OTA



MESH



Guest Wi-Fi

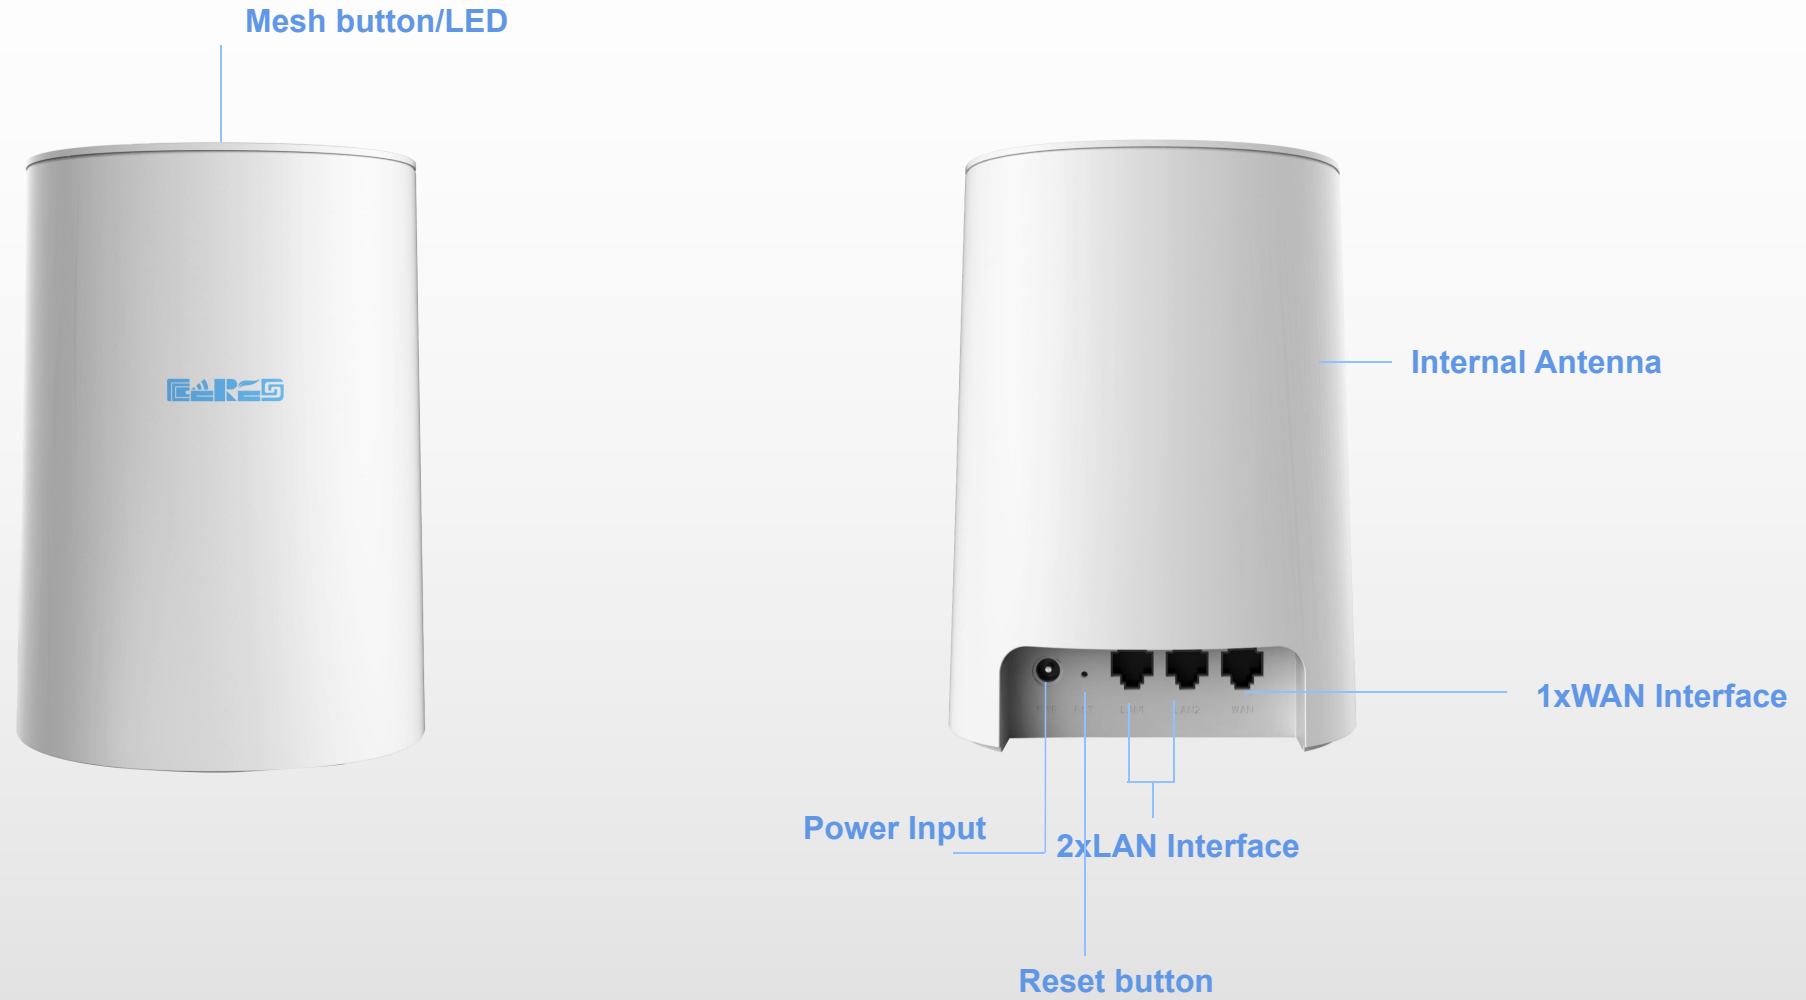

Place it anywhere, mesh networking

Automatically select the networking mode to ensure a better Internet experience.



Hardware Features



Name	AC1200 Wireless Router
Model	WR625G
CPU	MTK CPU MT7621D
Memory /Storage	128MB/16MB
Wi-Fi Antennas	2×2.4GHz 2×5GHz Internal 3dBi Gain
Protocol	IEEE 802.11a/b/g/n/ac
Wi-Fi Speed	2.4G Wi-Fi (Speed 300Mbps) 5G Wi-Fi (Speed 867Mbps)
MESH LED	Blue Light Flashing: Mesh networking Green Light Successfully connected Mesh

Interface	WAN	1 RJ45 port ,10/100/1000Mbps
	LAN	2 RJ45 port ,10/100/1000Mbps
	Mesh	Button
Transmit Power	2.4G	20dBm
	5G	20dBm
Power Supply	DC12V/1A Adapter	
Power Consumption	<10W	
Dimension	166x120x80mm	
Operating Temperature	-10 ~ 50°C	
Storage Temperature	-40 ~ 85°C	

Software Features



IP Protocols	IPv4/IPv6	Guest Wi-Fi	2.4G Guest SSID 5G Guest SSID
WAN Mode	Dynamic IP Static IP PPPoE	Parental Controls	Limited Time DD/MM Monday to Sunday
Security	Firewall Access Control IP & MAC Binding MAC/IP/URL/Port Filter Application Layer Gateway DDoS Attack Prevention	Equipment Mode	Router Bridge Relay
System Service	DDNS Telnet Server DMZ Host UPnP Remote WEB OTA Upgrade Diagnosis NTP	Management	WEB Telnet TR069
		System log	System log
		Multicast	IPTV IGMP
		QoS	Speed limit
		MESH	EasyMesh

Product Model	Product Description
WR625G	1*10/100/1000Base-Tx Ethernet WAN port, 2*10/100/1000Base-Tx Ethernet LAN ports, external 4*3dBi antennas, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac protocol, wireless transmission rate 1200Mbps, 12VDC power supply.

Contact Us

Shenzhen Ceres Technology Co., Ltd.
Address: Floor 6, Building F, Songbai Road 1008,
Sunshine Community, Xili Street, Nanshan District,
Shenzhen(518108)

Tel: +86-755-26014509/4710/4711
Fax: +86-755-26014506
Email: marketing@cerestec.com
Website: www.szceres.com